


Aquiles Safe-Base 12 mm

Technical data sheet

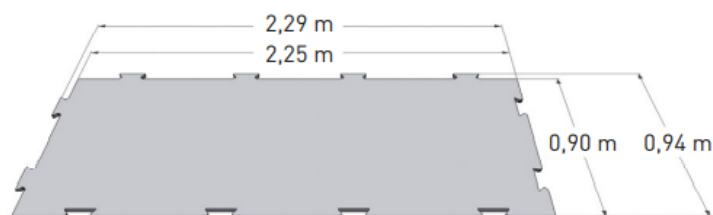

Fysieke karakteristieken	Tolerantie	Waarde	Norm
Dikte bij 2 kPa belasting	± 1	12 mm	EN-ISO 9863-1
Massa per oppervlakte-eenheid	± 0,4	108 kg/m ²	EN-ISO 9864-1
Vereiste karakteristieken door internationale sportbonden			
Tolerantie		Waarde	Norm
Treksterkte	> 0,15	0,26 MPa	EN 12230
Waterdoorlaatbaarheid (IA)	> 180	36.000 mm/uur	EN 12616
Prestatie karakteristieken		Waarde	Norm
Krachtreductie		/	AAA**
Energierestitutie		/	AAA**
Verticale deformatie		/	AAA**
Schokabsorptie		/	EN 14808
Verticale deformatie		/	EN 14809
Kritische valhoogte (HIC - 1000)		/	EN 1177
Thermische weerstand (R-waarde)		0,24 m ² .K/W	EN 12667


** Advanced Artificial Athlete

Aquiles BV has the right to alter each product specification in order to improve the artificial grass according to the newest technological applications.

Aquiles BV is not legally liable in case of non-compliance with the above mentioned specifications.

Aquiles Safe-Base 25 mm

Technical data sheet

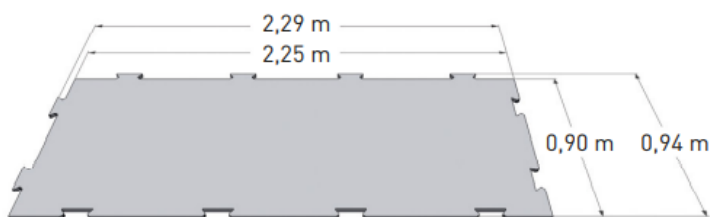

Physical characteristics	Tolerance	Value	Standard
Thickness at 2 kPa load	± 2	27 mm	EN-ISO 9863-1
Mass per unit area	± 0,41	2,7 kg/m ²	EN-ISO 9864-1

Performance characteristics	Value	Standard
Force reduction	70%	AAA**
Vertical deformation	11 mm	AAA**
Critical fall height (HIC-1000)	0,8 m	EN 1177
Thermal resistance (R-value)	0,54 m ² .K/W	EN 12667
Water infiltration rate (IA)	36.000 mm/h	EN 12616


** Advanced Artificial Athlete

Aquiles BV has the right to alter each product specification in order to improve the artificial grass according to the newest technological applications.

Aquiles BV is not legally liable in case of non-compliance with the above mentioned specifications.

Aquiles Safe-Base 35 mm

Technical data sheet

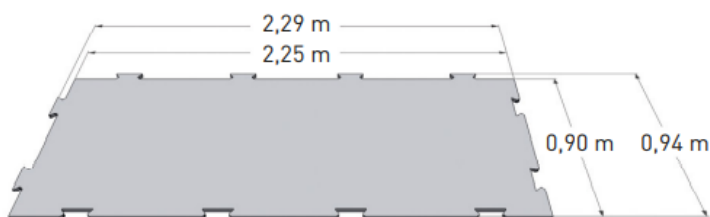

Physical characteristics	Tolerance	Value	Standard
Thickness at 2 kPa load	± 2	37 mm	EN-ISO 9863-1
Mass per unit area	± 0,50	3,3 kg/m ²	EN-ISO 9864-1

Performance characteristics	Value	Standard
Force reduction	75%	AAA**
Vertical deformation	13 mm	AAA**
Critical fall height (HIC-1000)	1.3 m	EN 1177
Thermal resistance (R-value)	0,74 m ² .K/W	EN 12667
Water infiltration rate (IA)	36.000 mm/h	EN 12616


** Advanced Artificial Athlete

Aquiles BV has the right to alter each product specification in order to improve the artificial grass according to the newest technological applications.

Aquiles BV is not legally liable in case of non-compliance with the above mentioned specifications.

Aquiles Safe-Base 45 mm

Technical data sheet

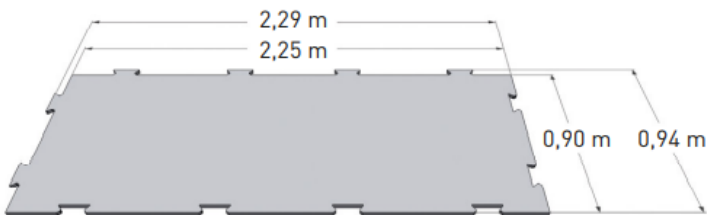

Physical characteristics	Tolerance	Value	Standard
Thickness at 2 kPa load	± 2	47 mm	EN-ISO 9863-1
Mass per unit area	± 0,60	4 kg/m ²	EN-ISO 9864-1

Performance characteristics	Value	Standard
Force reduction	78%	AAA**
Vertical deformation	14 mm	AAA**
Critical fall height (HIC-1000)	1.7 m	EN 1177
Thermal resistance (R-value)	0,94 m ² .K/W	EN 12667
Water infiltration rate (IA)	36.000 mm/h	EN 12616


** Advanced Artificial Athlete

Aquiles BV has the right to alter each product specification in order to improve the artificial grass according to the newest technological applications.

Aquiles BV is not legally liable in case of non-compliance with the above mentioned specifications.

Aquiles Safe-Base 55 mm

Technical data sheet

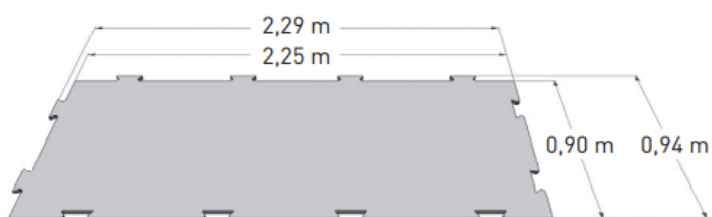

Physical characteristics	Tolerance	Value	Standard
Thickness at 2 kPa load	± 2	57 mm	EN-ISO 9863-1
Mass per unit area	± 0,69	4,6 kg/m ²	EN-ISO 9864-1

Performance characteristics	Value	Standard
Force reduction	81%	AAA**
Vertical deformation	15 mm	AAA**
Critical fall height (HIC-1000)	2.0 m	EN 1177
Thermal resistance (R-value)	1.14 m ² .K/W	EN 12667
Water infiltration rate (IA)	36.000 mm/h	EN 12616

** Advanced Artificial Athlete

Aquiles BV has the right to alter each product specification in order to improve the artificial grass according to the newest technological applications.

Aquiles BV is not legally liable in case of non-compliance with the above mentioned specifications.